

Midea



CHIONE

INVERTER

AI Comfort All in One

Inverter Split Wall Mounted
PRODUCT CATALOGUE

2026

Smart Energy Management

Visible saving under your thumb



SmartHome
Smart Compatible




Energy Monitor

Monitor the daily, weekly, and monthly usage duration and energy consumption of the air conditioner.



Energy Report

The energy consumption report includes ECOMASTER activation time, energy usage, and comparisons with the previous month.



Time Forecasting

Active ECOMASTER at cool mode, you can see how soon the room temperature is going to reach the target temperature.



Energy Reminder

Set a monthly energy consumption target, and you will be notified once the consumption reaches a percentage of the set target.

Smart Scenario Application

Control Sharing
Share device and account with families

My Favorite
Personalized preferred setting based on personal habits

Pet Care Scene
Preset pet care conditions when away from home

Location Based Service
Set home location, AC auto turns on/off when you arrive/leave.

Filter Management
Preset filter running time and receive filter replacement reminder

Weather Linked Service
Automatically activate AC based on preset weather conditions

Sleep Curve
Customized sleep curve

Smart Ecological Connection

Midea air conditioning supports multiple device connections, including tablets, smart speakers, and smart watches, allowing you to control the air conditioning hands-free at home at any time. It also supports device sharing, so multiple users can enjoy coolness at will.

works with alexa

Works with Apple Home

works with IFTTT

Hey Siri!

works with Google Home

Hey Google!

Alexa!

Smart Home

Download on the App Store

GET IT ON Google Play

Master AI Saving, Better Comfort Cooling

Real AI master control based on giga-scale big data, Balancing energy-saving and comfort needs.



Master Giga Data



Master Precise Control



Master Comfort Saving




Percentage energy saving compare to the lowest 2 stars rating air conditioning. 38% is applicable to 1HP Chlorine Inverter.

MASTER
30%* Extra
Energy Saving with AI Algorithm

MASTER AI Temperature Control
±0.3°C

Verified by Performance Tested
Temperature Control
Precise to ±0.3°C
50% Energy Saving with AI Algorithm

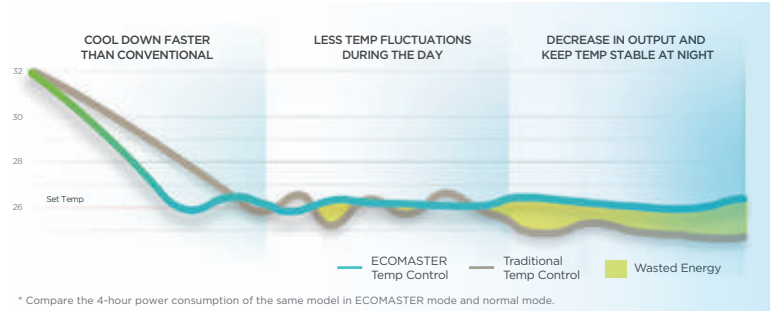

AI Humidity Control

(Optional by Apps)

Midea's AI Humidity Control automatically maintains the ideal 40%-70% RH range for ultimate comfort. Powered by AI algorithms, it intelligently adjusts fan speed and cooling power to add or remove moisture, ensuring you enjoy fresh, balanced air without ever lifting a finger.

ONE CLICK TO PERFECT HUMIDITY

Silent Mode

Worried your AC's constant hum might be disturbing your family or neighbors, especially at night? Midea's One-Touch Silent Mode significantly reduces outdoor unit noise.

Simply long-press the 'Fan Speed' button on your remote or activate it instantly via Smart Home app. Midea advanced algorithm then takes over, precisely optimizing the DC motor's speed in real-time. The result? A 3dB reduction—achieving 50%* less noise energy for a noticeably more peaceful environment, all while maintaining powerful cooling.

* Calculation follows the acoustic principle.
* For the best performance, Outdoor Silent Mode is available in Cooling Mode when the outdoor temp < 35°C.

ONE CLICK TO QUIET

-3dB | 50% Less Energy

I - Clean Reclean the AC, Refresh your breath.

Midea Inverter AC has been upgraded from water washing (20 mins) to frost cleaning (42 mins), which can remove more dust and bacteria, keeping the AC clean and performing well.

<h1>1</h1> <p>Condensed Water 10min</p> <p>Cooling mode & Mid-speed wind</p>	<h1>2</h1> <p>Frosting 10min</p> <p>The temperature cools rapidly (T ≤ -10°C) and frost forms on the evaporator surface.</p>	<h1>3</h1> <p>Washing 20min</p> <p>Defrost into water to remove dust and dirt.</p>	<h1>4</h1> <p>Drying 2min</p> <p>Dry the evaporator to prevent mold growth.</p>	<p>Total 42mins</p>
---	---	---	--	----------------------------

Prime Guard

Wide Voltage Operation

Thanks to Ultra Electronic Control System, Midea's Inverter can work stably in 80V-265V*. Whether it is the peak of urban electricity consumption or the shortage of power supply in remote areas, it can always work consistently and smoothly.



* The voltage operation range of BP3 is 80-265V, BP2 is 150-265V, and 18k and above is 120-256V.



Built to Last

Prime technologies in reliability and durability Guard comfort cool.


Reliable PCB with UV Conformal Coating

Curing using UV light, Greener and with 2x Thicker and Higher Density Protection

Corrosion Area <math><0.02\%</math>* **Rating Number** 9.8**


Verified by Intertek

* Depended on the using industrial environment with salt contamination (Ref. ISO 21207:2015, Annex A, test method B, JIS Z 2371:2015 Annex JC)
** The full rating number is 10.

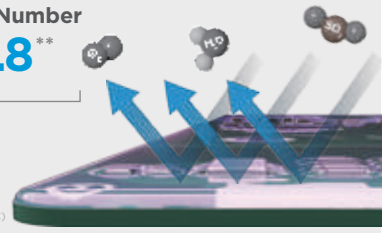

HYPER GRAPFINS™ 12.5X* Corrosion Resistance than Blue Coated Fins

Graphene is a single monolayer of carbon atoms, tightly bound in a hexagonal honeycomb lattice. When graphene is added to the anti-corrosion layer, the density of the layer can be improved to resist corrosion.

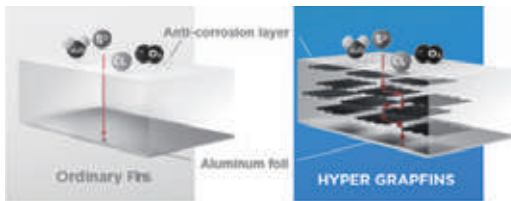

Verified by Intertek

* The judgment standard of corrosion resistance is based on comparing the maximum corrosion area ratio of the rating number in JIS Z 2371:2015. Compared samples are Midea fins: Midea blue coated fins in HD2202-2/HW330B, Midea HYPER GRAPFINS in HMD01/HW330B.

AUTO DEDUSTING



When the AC is turned off, the fan blade of the outdoor unit will automatically rotate in reverse to get rid of the accumulated sand and dust, ensuring the AC is clean and operates well in any environment.

Cool Flash

5°C
in 10 mins*
from 36°C to 31°C

Air Volume
665M³/h

Air Distance**
8.1M

The latest generation of COOLFLASH achieves faster cooling speed, stronger air circulation, larger swing angle, and further airflow distance through dual upgrades of hardware and software.

With one press of the COOLFLASH button, the room can be quickly cooled down to the desired temperature, immersing you in an evenly cool room.

* Tested by Midea Lab for 10-minute cooling. The room temp of 1.5HP Chione AC dropped by 5°C, with an initial room temp is 36°C, and the outdoor temp is 43°C, 60% RH.
** Tested on the 1.5HP Chione AC in Coolflash mode by Midea Lab, the farthest distance refers to a wind speed of no less than 0.3m/s



Power Cooling Beats the Heat

Even at high temperatures of up to 55°C, Midea Inverter still operates effectively, beating heat and providing optimal cooling to the room.



FEATURES



ECOMASTER
30% Extra Energy Saving



AI Humidity Control
(Option by Apps)



Silent Mode



HYPER GRAPFINS



Reliable PCB With UV Conformal Coating



I-Clean



Coolflash
5°C In 10 Mins



Smart Control



Wide Voltage Operation



Auto Dedusting

APPEARANCE



Indoor Unit



Remote Control



Wired control (optional)



Outdoor Unit



SPECIFICATIONS

Model	Indoor		MSCH-10CRFN8-ID	MSCH-13CRFN8-ID	MSCH-19CRFN8-ID	MSCH-22CRFN8-ID	MSCH-25CRFN8-ID	MSCH-30CRFN8-ID
	Outdoor		MSCH-10CRFN8-OD	MSCH-13CRFN8-OD	MSCH-19CRFN8-OD	MSCH-22CRFN8-OD	MSCH-25CRFN8-OD	MSCH-30CRFN8-OD
Cooling Capacity	Rated (Min-Max)	Btu/h	10,000(1,250-11,109)	12,000(3,900-12,500)	18,000(6,900-18,500)	22,000(4,265-23,000)	24,000(9,600-25,500)	30,000(11,500-31,000)
Power consumption	Rated (Min-Max)	W	880(135-1,050)	1,250(150-1,350)	1,758(190-1,850)	2,149(280-2,200)	2,512(790-2,750)	2,930(690-3,360)
Running current	Rated (Min-Max)	A	3.83(0.59-4.56)	5.09(1.6-5.87)	7.64(1.48-8.7)	9.34(1.3-10)	10.92(3.95-11.95)	12.2(4.5-14.6)
CSPP(Cooling seasonal performance factor)	Wh/Wh		5.68	5.41	5.30	5.27	5.11	5.23
Energy Efficiency Star Rating								
Power supply	V,Hz,Ph		220-240V~,50&60Hz,1Ph (power supply to indoor)					
Indoor unit	Fan motor type	Brushless DC Motor						
	Indoor air flow (H/M/L)	m ³ /h	630/440/400	630/440/400	895/740/650	1,300/960/760	1,300/960/760	1,300/1,030/900
		cfm	370/259/235	370/259/235	526/435/382	765/565/447	765/565/447	765/606/529
	Indoor Sound level (H/M/L)	dB(A)	39.5/34.5/31.5	39.5/34.5/31.5	44.5/37/34.5	48.5/40/36.5	47/40/36.5	46.0/42.0/39.5
	Dimension(W*D*H)	mm	813x201x289	813x201x289	975x218x308	1055x231x330	1055x231x330	1055x231x330
	Packing (W*D*H)	mm	870x270x365	870x270x365	1035x295x385	1130x405x310	1130x405x310	1130x405x310
Net/Gross weight	Kg	7.7/9.8	7.7/9.9	10.1/13.3	12.1/15.6	12.1/15.6	12.1/15.7	
Outdoor unit	Fan motor type	Brushless DC Motor						
	Outdoor air flow	m ³ /h(cfm)	1,300(765)	1,300(765)	2,100(1,235)	2,300(1,353)	2,500(1,471)	3,500(2,059)
	Outdoor Sound level	dB(A)	52	55	56	58	59	56.5
	Dimension(W*D*H)	mm	668x252x469	668x252x469	765x303x555	805x330x554	805x330x554	890x342x673
	Packing (W*D*H)	mm	765x270x515	765x270x515	887x337x610	915x370x615	915x370x615	995x398x740
	Net/Gross weight	Kg	16.7/18.6	17.0/18.5	24.2/26.9	27.4/29.7	29.9/32.5	38.3/41.4
	Refrigerant Charge	g	R32/360g	R32/420g	R32/650g	R32/750g	R32/830g	R32/900g
Design pressure	MPa	4.3/1.7	4.3/1.7	4.3/1.7	4.3/1.7	4.3/1.7	4.3/1.7	
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ15.9(1/4"/5/8")
	Max. refrigerant pipe length	m	25	25	30	30	50	50
	Max. difference in level	m	10	10	20	20	25	25
Indoor-Outdoor connection wiring (Not included)			4x1.5 mm ²	4x1.5 mm ²	4x2.5 mm ²	4x2.5 mm ²	4x2.5 mm ²	4x2.5 mm ²
Power supply wiring (Not included)			3x1.5 mm ²	3x1.5 mm ²	3x2.5 mm ²	3x2.5 mm ²	3x2.5 mm ²	3x2.5 mm ²
Thermostat type			Wireless Remote Control,Built-in Smart Control (Wired control optional)					